



Assembled Clock Instructions

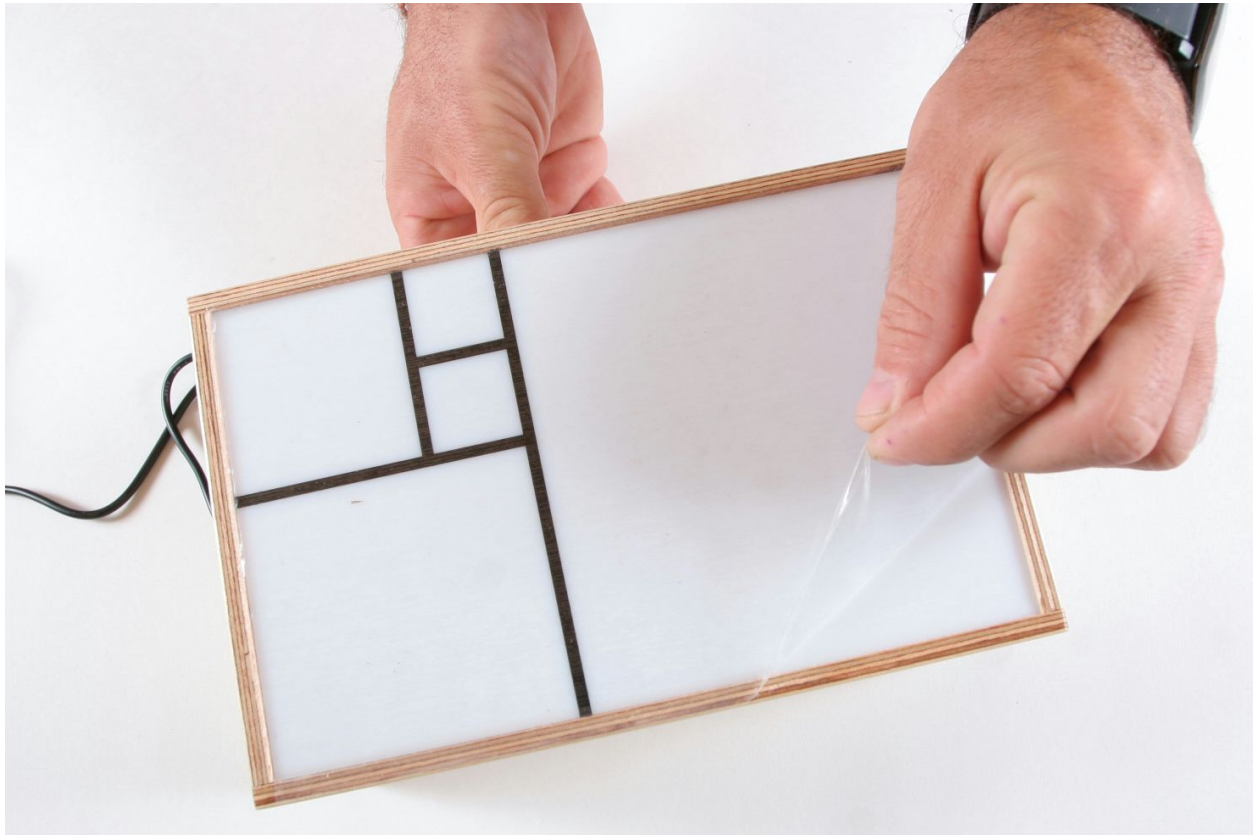


Connect Power


The clock has to be powered by the 6V 800mA transformer that comes with your Fibonacci Clock.

To connect the power cord to the clock you will first need to remove the back panel.

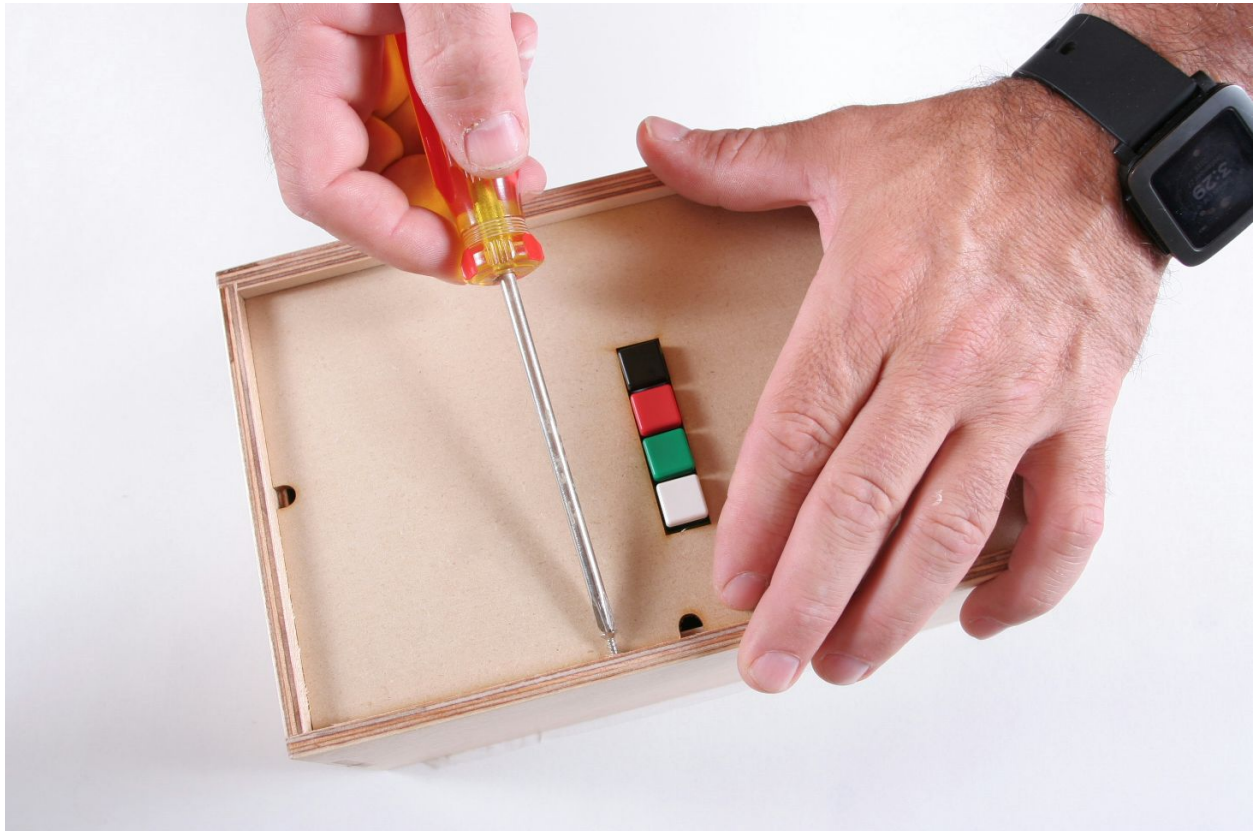


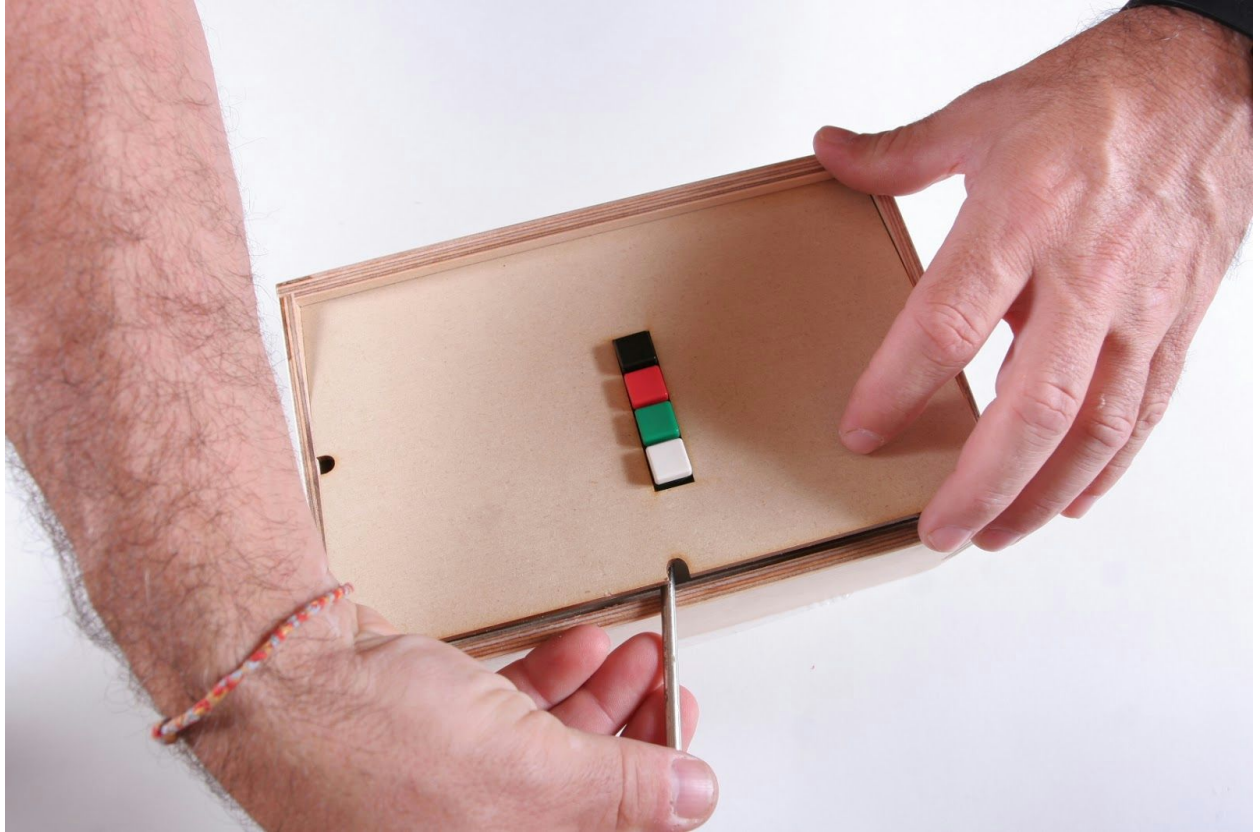


Once the back panel removed, you connect the power adapter connector to the circuit board as displayed here.

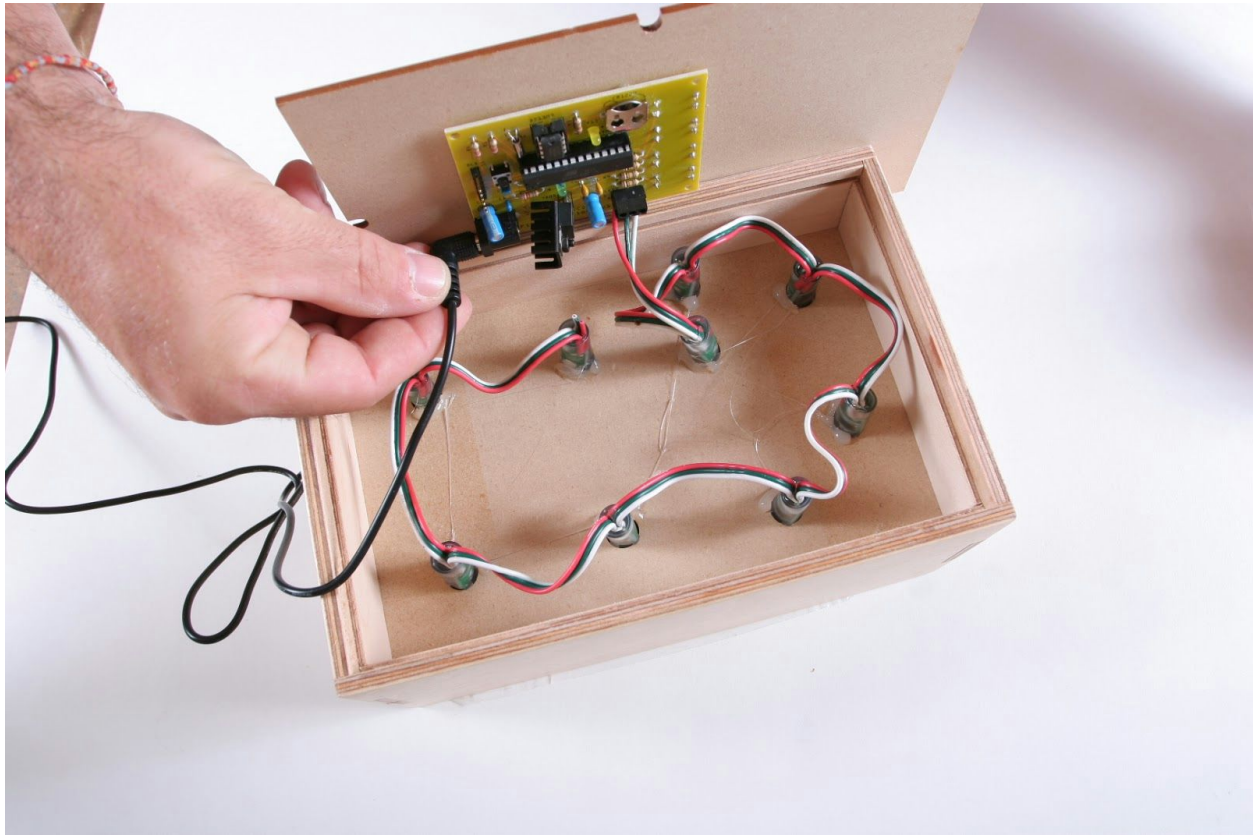

Finally you replace the back cover.

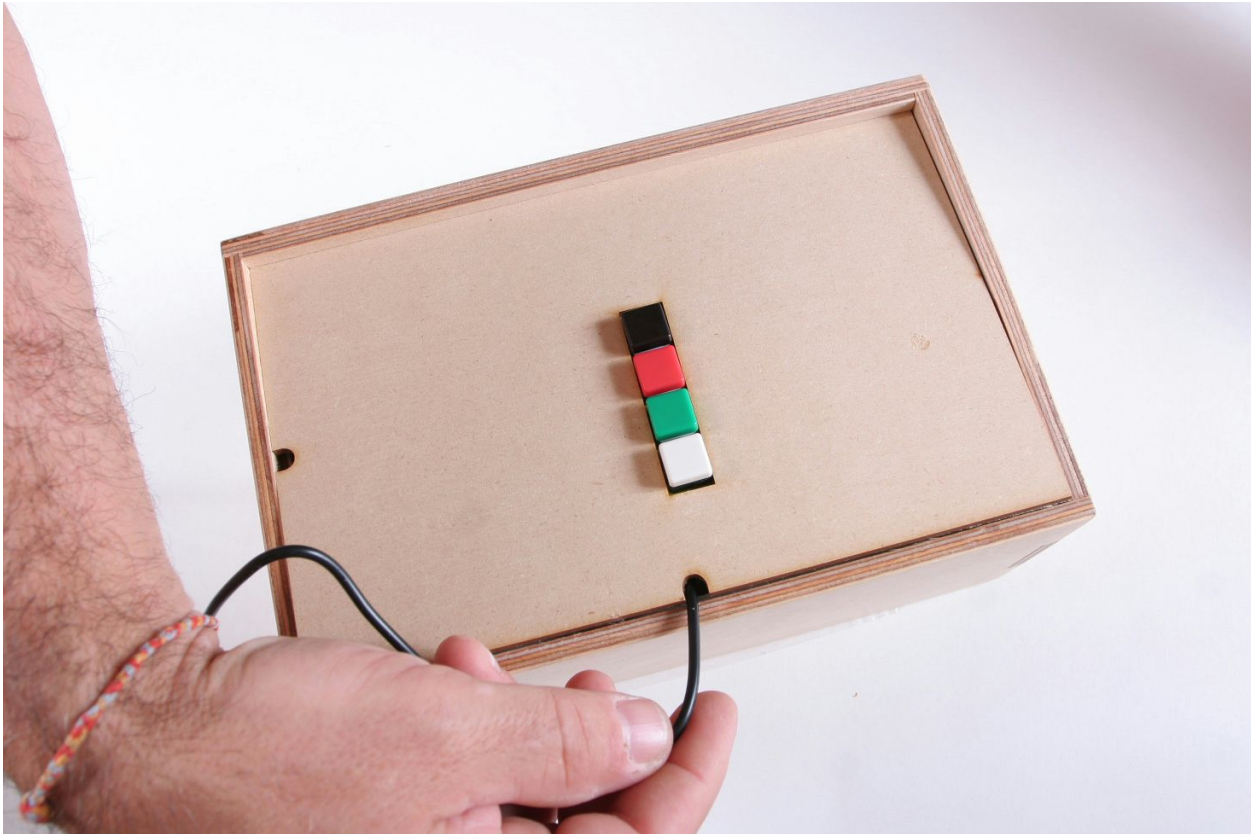

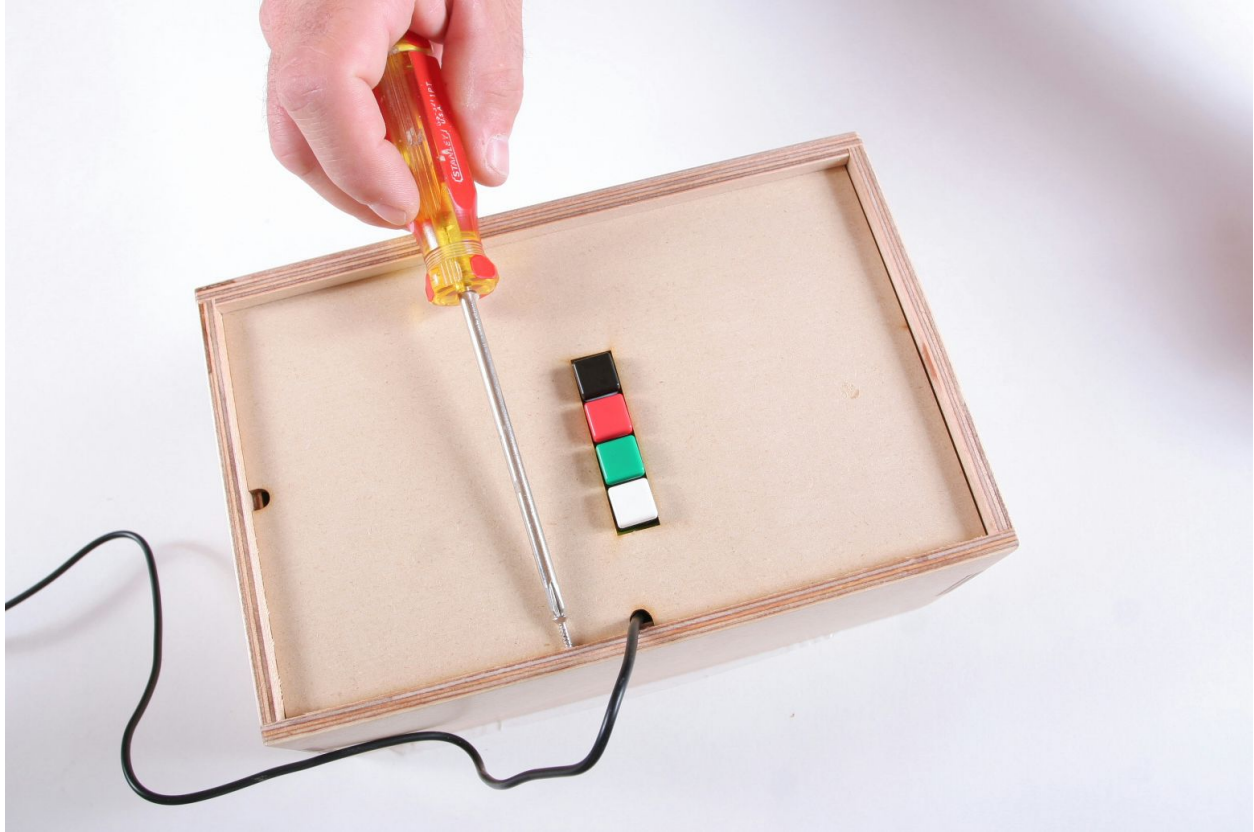

Peel Off The Protective Film

Peel off the protective film from the clock faceplate.

